

RainScreen Duo Slab®

Non-combustible insulation for ventilated façades.

RainScreen Duo Slab® is a stone wool insulation product specifically developed for use within ventilated cladding systems, as well as sealed systems such as curtain walling.

Manufactured using dual-density technology, the outer surface of each slab features a distinctly higher density than the underside. This provides a firm surface for the application of fixings, while the underside can accommodate unevenness in the substrate.

Once installed, the higher density outer surface works in combination with a factory-applied water repelling agent to give improved resistance to rain ingress during construction.

The product can be fitted around brackets and other awkward details, and when tightly butted, adjacent slabs effectively 'knit' together to provide a continuous insulating layer, reducing heat losses that would otherwise be caused by gaps.¹


- BBA approved – Certificate 17/5402.
- Non-combustible Euroclass A1.
- Independently tested acoustic benefits.
- Can be recycled and reprocessed through our Rockcycle® programme², helping to reduce construction waste sent to landfill.



¹ROCKWOOL Technical Bulletin 3 – Performance Gap

²rockwool.com/uk/about-us/sustainability/recycling

RainScreen Duo Slab

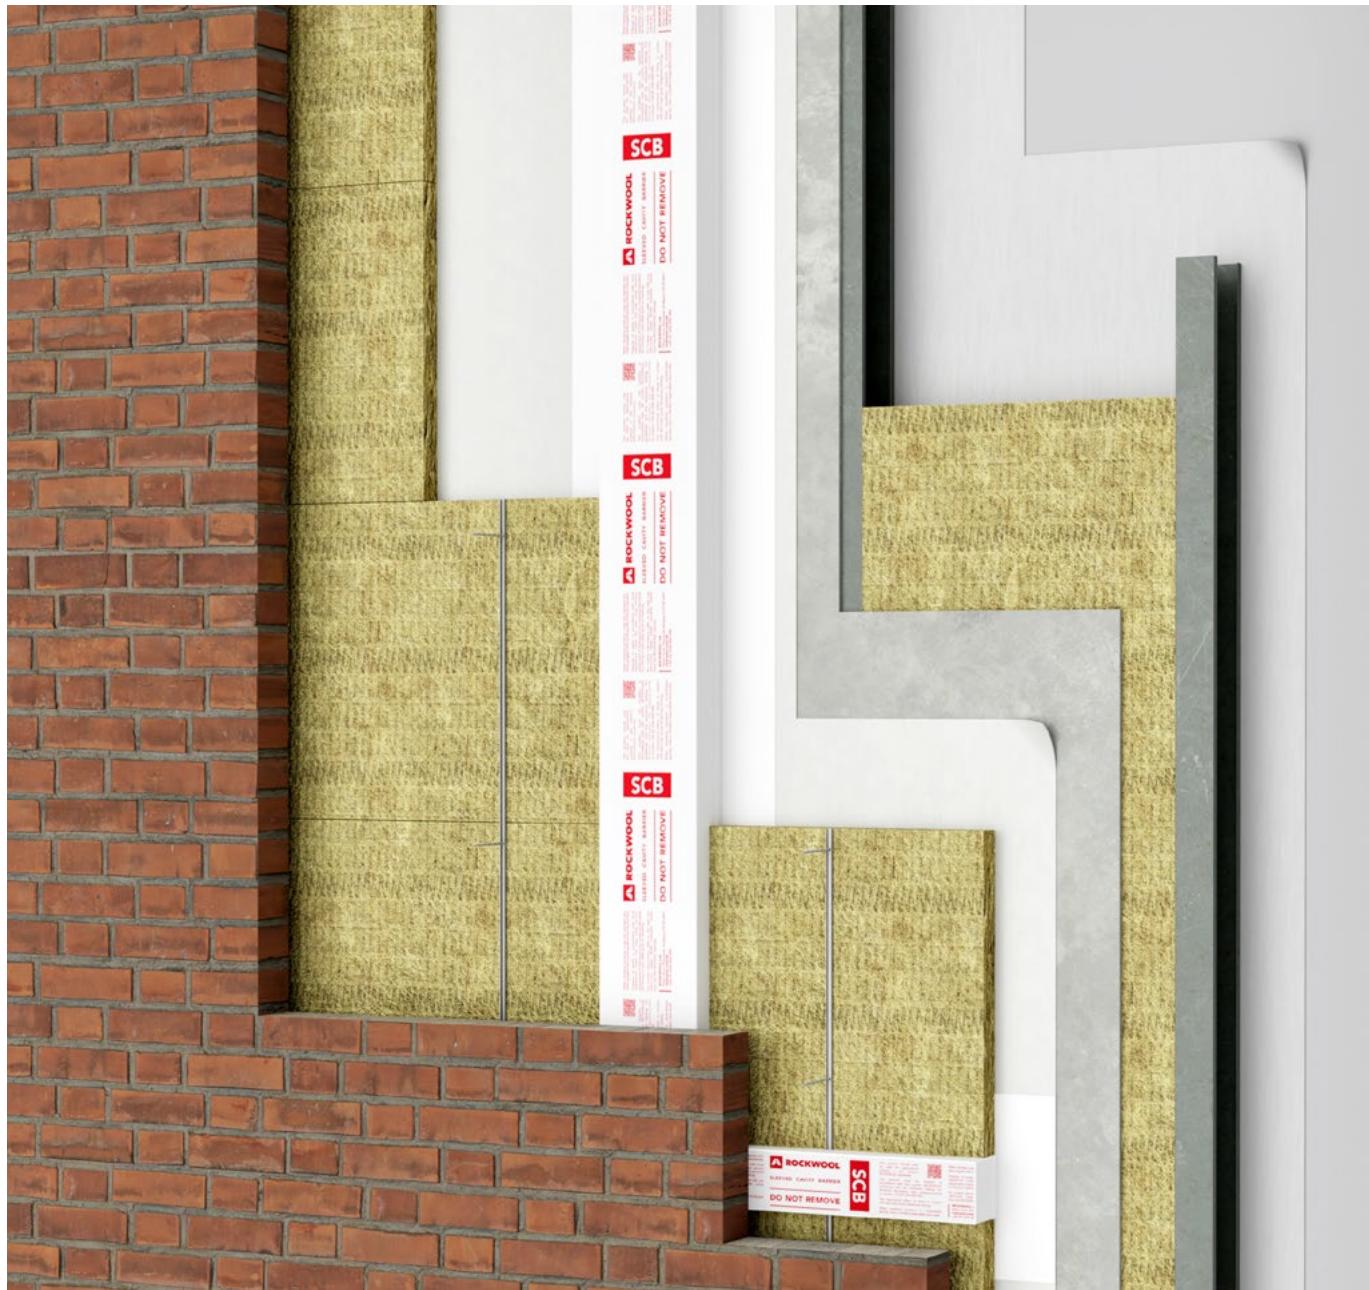

APPLICATIONS

RainScreen Duo Slab is suitable for use on the following construction types:

- Steel frame, timber frame, or masonry walls in conjunction with a cladding system.
- Steel frame or timber frame with a masonry outer leaf.

For more information visit rockwool.com/uk

Pencoed, Bridgend CF35 6NY
Tel: (+44) 1656 862 621 • technical.solutions@rockwool.com
Page 2 of 12

RainScreen Duo Slab

PERFORMANCE

Thermal performance

Thermal conductivity = 0.034 W/mK (<90mm) / 0.035 W/mK (\geq 90mm)

Acoustic performance

As demonstrated by independent in-situ laboratory testing, RainScreen Duo Slab helps to reduce the transfer of airborne noise – with results for typical systems as high as R_w 62 dB*. For more information please see the [Rainscreen Acoustic Reference Guide](#), available on our website.

*Test report C/23666/T01.

Fire performance


Rated Euroclass A1 when assessed to EN 13501-1 using test data from reaction-to-fire tests.

Water resistance

ROCKWOOL stone wool insulation is water repellent and non-hygroscopic, meaning it will not absorb water from the surrounding environment. It retains its thermal performance even in humid conditions, helping to support the durability of the building fabric.

Condensation control

The vapour resistivity of ROCKWOOL mineral wool is 5.9MNs/gm. The slabs therefore help reduce the risk of condensation, allowing natural drying-out of the structure. See typical relative humidity / temperature graph below.

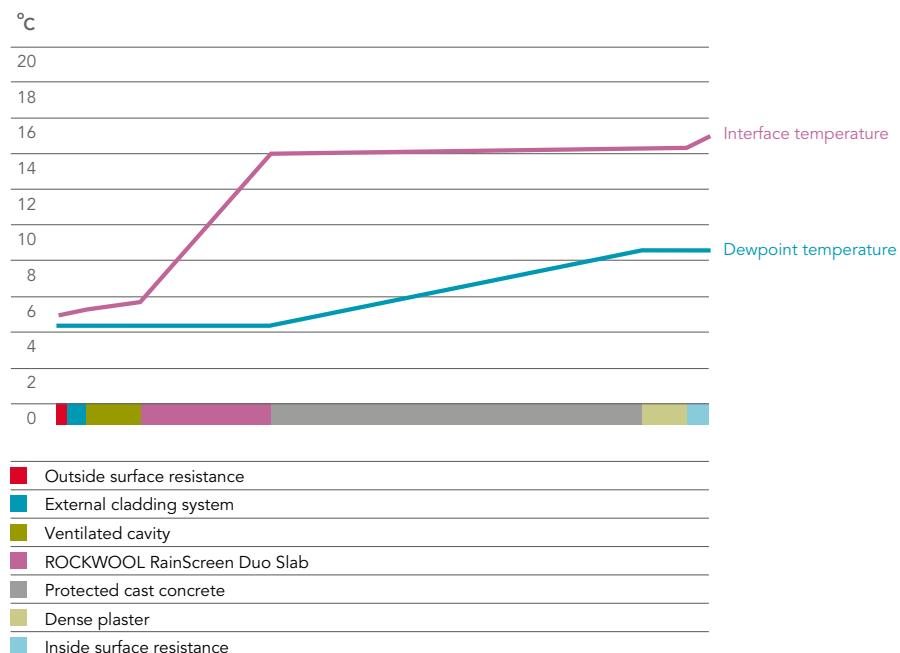


RainScreen Duo Slab

U-values

1. Cladding system in conjunction with concrete/masonry

RainScreen Duo Slab between metal bracket system on 200mm reinforced concrete.

| RainScreen Duo Slab (mm) | U-Value (W/m ² K) |
|--------------------------|------------------------------|
| 125 | 0.28 |
| 150 | 0.24 |
| 175 | 0.21 |
| 210 | 0.18 |
| 250 | 0.16 |

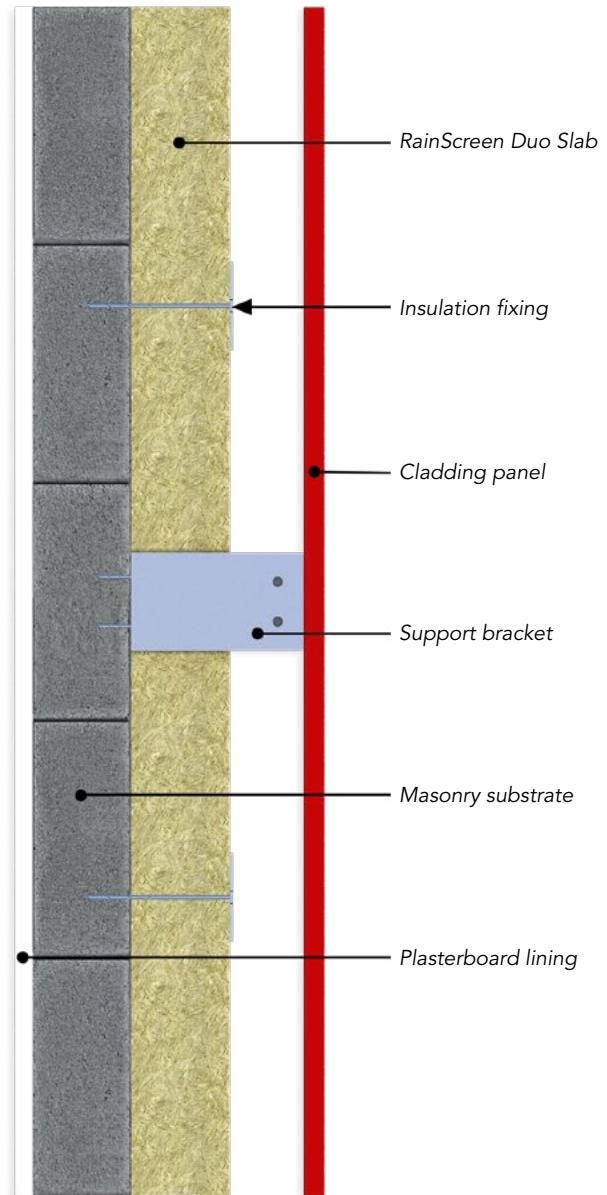

Notes

- Tables based on point-loss scenarios where only the rainscreen brackets bridge the thermal insulation layer.
- U-values shown have been calculated with a thermal bridging allowance which has been determined using a 3-dimensional analysis in accordance with BR443. The system modelled included 8mm Rockpanel Rockclad and Plastestrip Thermaframe stainless steel brackets.

RainScreen Duo Slab


2. Cladding system in conjunction with steel frame filled with ROCKWOOL Steel Frame Slab

RainScreen Duo Slab on 150mm deep metal studs at 600mm centres with 140mm ROCKWOOL Steel Frame Slab installed within the frame.

| RainScreen Duo Slab (mm) | Steel Frame Slab (mm) | U-Value (W/m ² K) |
|--------------------------|-----------------------|------------------------------|
| 75 | 140 | 0.25 |
| 100 | 140 | 0.22 |
| 125 | 140 | 0.20 |
| 150 | 140 | 0.18 |
| 180 | 140 | 0.17 |
| 225 | 140 | 0.15 |

Notes

- U-values shown have been calculated with a thermal bridging allowance which has been determined using a 3-dimensional analysis in accordance with BR443. The systems modelled included 8mm Rockpanel Rockclad and FastFrame rainscreen brackets.

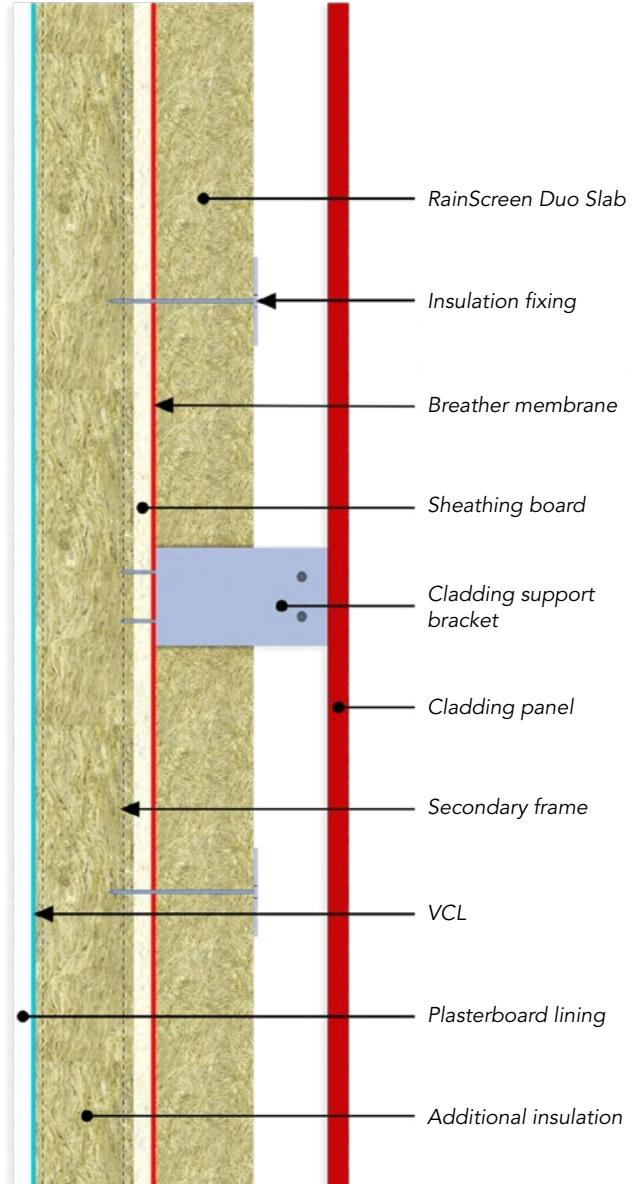

RainScreen Duo Slab

3. Masonry outer in conjunction with steel frame filled with ROCKWOOL Steel Frame Slab

RainScreen Duo Slab on 100mm steel frame filled with ROCKWOOL Steel Frame Slab.

| RainScreen Duo Slab (mm) | Steel Frame Slab (mm) | U-Value (W/m ² K) |
|--------------------------|-----------------------|------------------------------|
| 50 | 100 | 0.27 |
| 75 | 100 | 0.22 |
| 100 | 100 | 0.19 |
| 125 | 100 | 0.17 |
| 150 | 100 | 0.15 |
| 210 | 100 | 0.12 |

Notes


- U-values shown have been calculated with a thermal bridging allowance which has been determined using a 3-dimensional analysis in accordance with BR443. The systems modelled included 8mm Rockpanel Rockclad and FastFrame rainscreen brackets.

Typical specification

The rainscreen insulation is to be RainScreen Duo Slab mm thickness, as manufactured by ROCKWOOL Limited, Pencoed, Bridgend CF35 6NY, secured to the substrate with metal and polypropylene fixings in accordance with the RainScreen Duo Slab datasheet.

Horizontal joints should be staggered and all joints tight butted.

The slabs should be fixed with the robust (patterned) surface facing outwards.

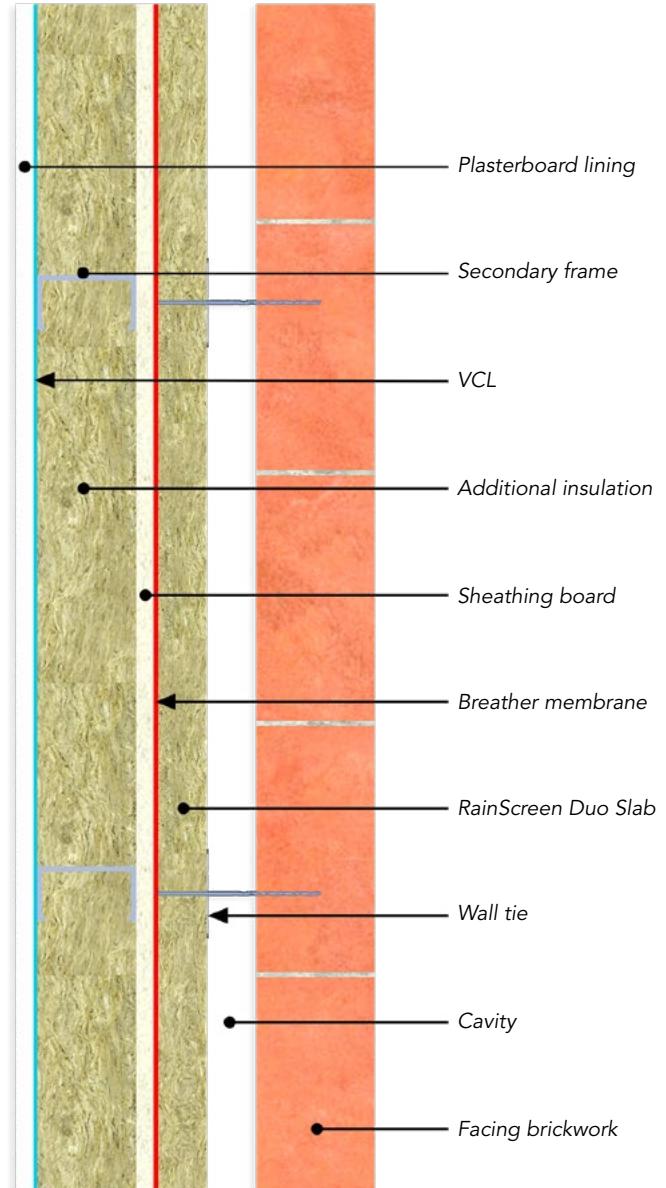

RainScreen Duo Slab

PRODUCT INFORMATION

| Length (mm) | Width (mm) | Standard thicknesses (mm) |
|--------------|------------|-------------------------------------------------------------------------------------------------------|
| 1200 (Plain) | 600 | Available in a range of sizes between 50mm and 230mm. Please see current price list for availability. |
| 1000 (Faced) | 600 | |

STANDARDS AND APPROVALS

Certificate

RainScreen Duo Slab has been examined by the BBA and granted Certificate 17/5402 for use in ventilated rainscreen cladding systems on both domestic and non-domestic buildings.

RainScreen Duo Slab satisfies the requirements of BS EN 13162 – “Thermal insulation products for buildings. Factory made mineral wool (MW) products”.

INSTALLATION

Work on site

RainScreen Duo Slab is supplied in shrink-wrapped polythene packs. Pallets are fitted with a waterproof hood that is suitable for outside storage.

The product can be cut and shaped using an insulation knife.

Fixings

A suggested fixing pattern is provided based on the results of wind resistance testing carried out at the BRE.

The adequacy of this or any other fixing pattern should be verified on a per-project basis through assessment by a suitably qualified individual.

The following non-exhaustive list of companies can supply fixings suitable for use with RainScreen Duo Slab: EJOT, Fischer, ITW Construction Products, Hilti.

Exposure

It is recommended that the sequence of construction is programmed in such way that insulation is left exposed for as little time as possible.

While ROCKWOOL insulation is impregnated with a water repelling agent, and is resistant to wind and rain, it is not designed to offer indefinite protection to a substructure. Depending on the nature of the substrate, a protective membrane may be required. Such design issues will require assessment by a suitably qualified individual.

Subjecting RainScreen Duo Slab to any level of exposure is contingent on a visual inspection of the insulation prior to the installation of the cladding. In the unlikely event that any slabs have become physically damaged or otherwise contaminated, they should be replaced.

Once the weatherproof layer is installed, the resulting ventilated cavity will ensure that any wetted slabs will naturally dry out, regaining all of their original performance and properties.

Pencoed, Bridgend CF35 6NY

For more information visit rockwool.com/uk

Tel: (+44) 1656 862 621 • technical.solutions@rockwool.com

Page 7 of 12

RainScreen Duo Slab

For use on steel frame, timber frame, or masonry walls in conjunction with cladding

- The product should be applied with the printed patterned side (where appropriate) facing outwards.
- Slabs should be close-butted at all vertical and horizontal joints. The horizontal joints of the insulation should be staggered in accordance with good practice.
- Fixings should have a minimum head diameter of 70 mm. A typical fixing pattern has three fixings per square metre with one metal fixing at the centre of every slab (see Figure 1).
- The product should be cut and tightly fitted around cladding support elements.
- For a typical installation, a breathable membrane is placed between the sheathing board and the product. A VCL is placed between the plasterboard and the frame.

Cavity barriers:

ROCKWOOL recommends the use of SP FireStop EN vertically and SP FireStop OSCB horizontally.

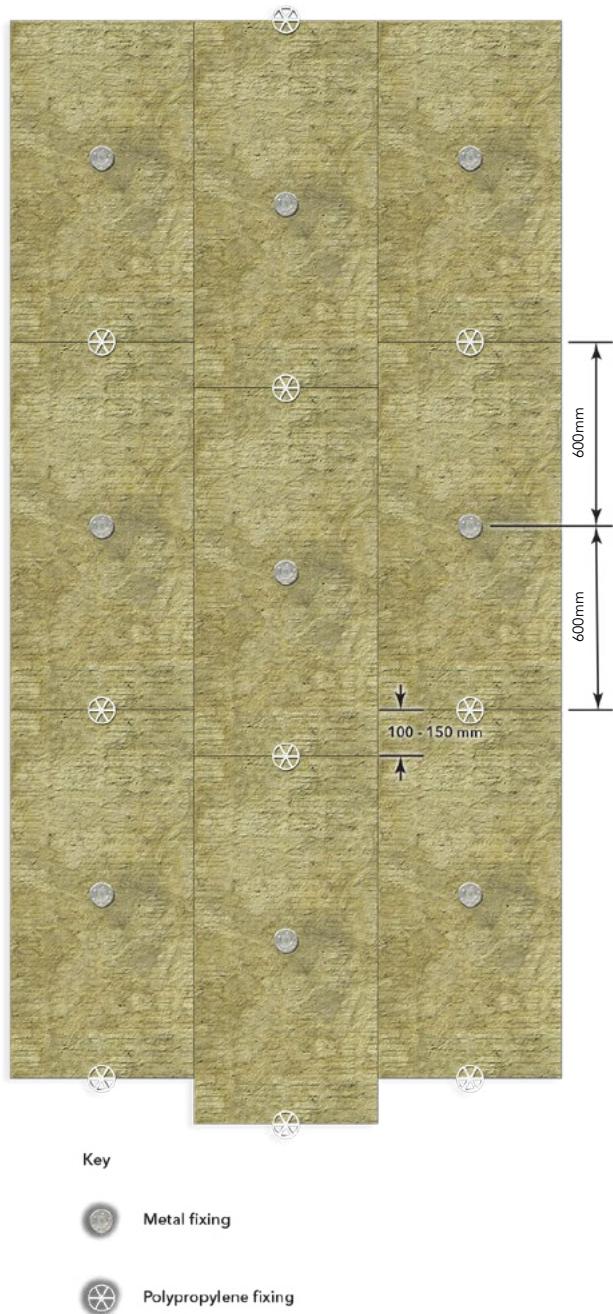
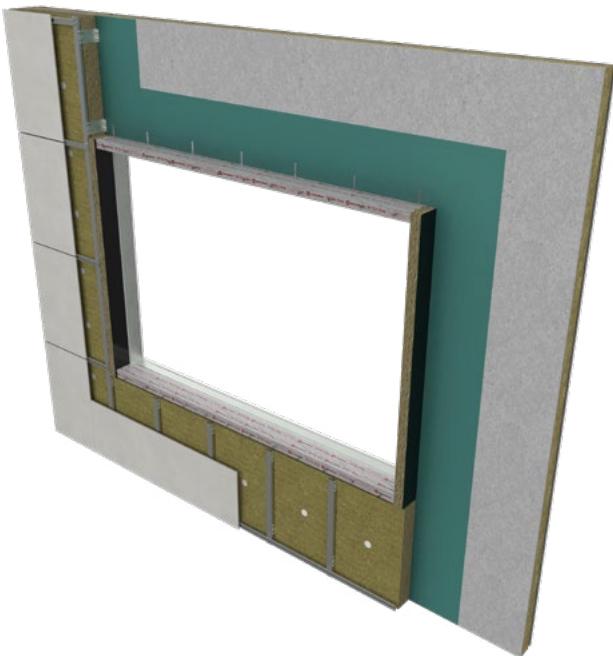


Figure 1

Typical fixing pattern with 3 fixings per square metre

RainScreen Duo Slab

For use on steel- or timber-frame walls in conjunction with a masonry outer leaf:


- The product should be applied with the printed patterned side (where appropriate) facing outwards.
- The slabs should be close-butt at all vertical and horizontal joints, and at corners. The horizontal joints of the slabs should be staggered in accordance with good practice.
- Slabs should be carefully cut to fit around any protrusions into the cavity.
- A VCL is placed between the plasterboard and the frame. A breathable membrane is placed between the sheathing board and the product.
- The insulation should be installed to coincide with the frame, with retaining discs used in conjunction with the wall ties at no more than 600 mm horizontally and 450 mm vertically.
- After each section of the leading leaf is built, excess mortar should be removed from the cavity face and mortar droppings cleaned from exposed edges of the installed board, before installation of the next run of boards. Use of a cavity board or a cavity batten will protect the installed board edges.

Cavity barriers:

ROCKWOOL recommends the use of SP FireStop EN both horizontally and vertically.

Masonry restraint systems:

RainScreen Duo Slab is compatible with masonry restraint systems. With such systems we recommend that insulation fixings are installed as per Figure 1. For information on available systems, please contact providers such as ACS Stainless or Ancon.

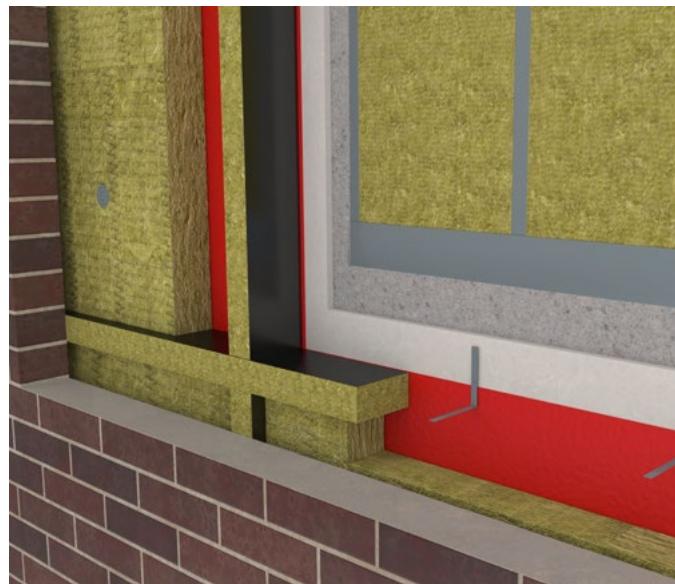

SPECIFICATION CLAUSES

RainScreen Duo Slab are associated with the following NBS clauses:

| |
|------------|
| H11 |
| 110 |
| H11 |
| 780 |
| H92 |
| 776 |
| P10 |
| 217 |

RainScreen Duo Slab

BUILDING SAFETY AND PRODUCT USE

LEGAL NOTICES

General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:
marketcom@rockwool.com

Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor®, Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2025.
All rights reserved.

Health and safety

A Material Safety Data Sheet is available and can be downloaded from rockwool.com/uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:
marketcom@rockwool.com

RainScreen Duo Slab

| | |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Company: | ROCKWOOL Limited |
| Version: | Version 1.06 November 2025 (to check this is the latest version, please refer to rockwool.com/uk) |
| Revised on: | 12.11.2025 |
| Product name: | RainScreen Duo Slab |
| Replaces version: | Version 1.05 October 2025 |
| Changes made: | <ul style="list-style-type: none">• Updated acoustic performance test report |
| Additional information: | N/A |

Please ensure you are using the latest version of this document by verifying it on our official website. Do not rely on printed or previously downloaded copies, as these may be out of date.

Please contact the ROCKWOOL Technical Support Team if you would like to access archived versions of this document.

RainScreen Duo Slab

ROCKWOOL stone wool – safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




Sustainability

ROCKWOOL products are used to help enrich modern living, supporting more resilient and comfortable buildings.

We transform abundant, natural volcanic rock into stone wool insulation products that help our customers tackle energy consumption, noise pollution, fire resilience, and climate change challenges such as water scarcity and flooding.

Since our stone wool is endlessly recyclable with no loss in its performance properties, we can take back clean, uncontaminated new off-cuts and unused ROCKWOOL stone wool insulation from construction sites in the UK. Our service, Rockcycle®, takes back our stone wool and recycles it back into production where it is used to make new ROCKWOOL products.

Our annual sustainability reports, which set out progress against our sustainability goals, and further details of the positive impacts of using our products can be found on our website.



Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).



For more information visit rockwool.com/uk

Pencoed, Bridgend CF35 6NY
Tel: (+44) 1656 862 621 • technical.solutions@rockwool.com

Page 12 of 12